


DIMENSIONS – TECHNICAL DATA SHEET

HYDRAULIC LIFT LINK - 80/40min.600 fi 26/22

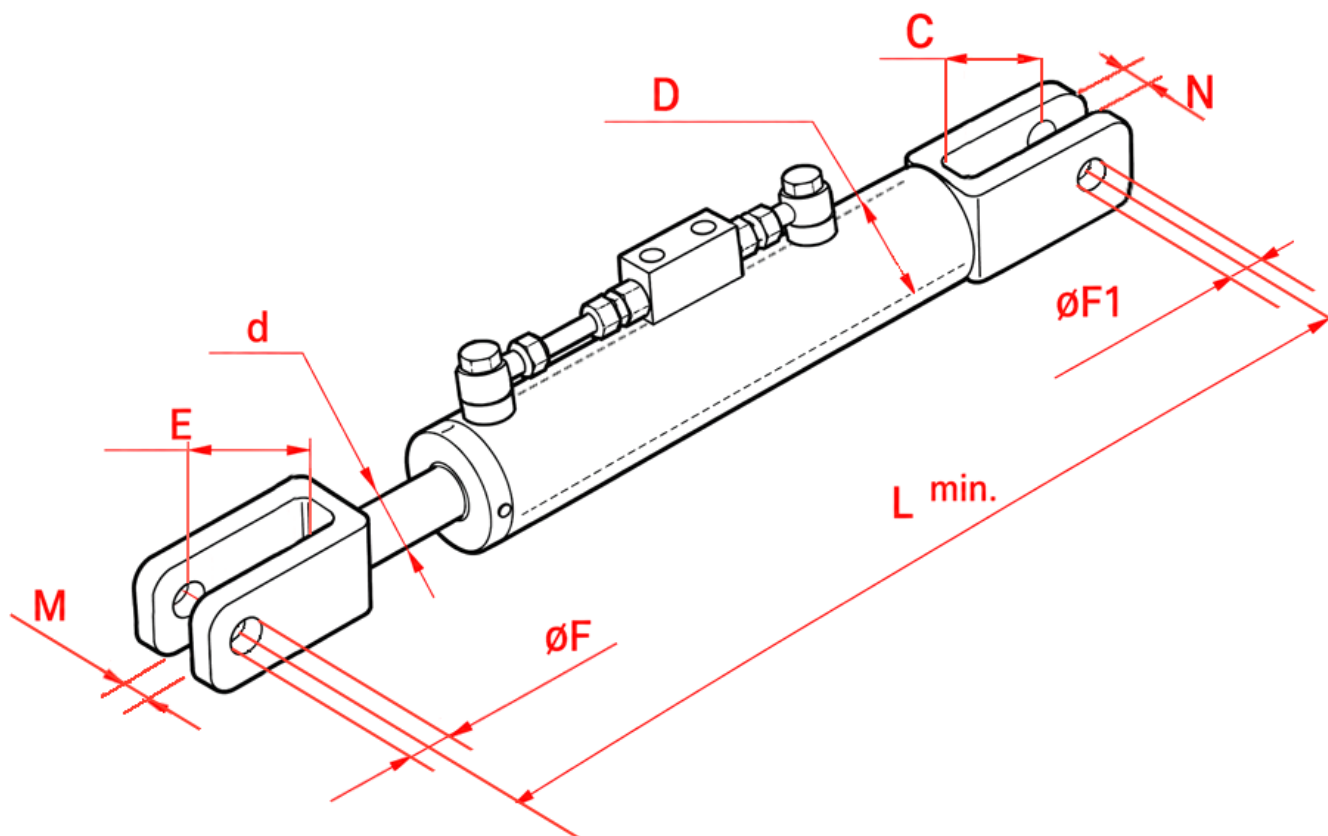

Internal fork width "N":	37 mm
Internal fork width "M":	32 mm
Distance between cylinder bottom and hole center "C":	60 mm
Distance between inside of fork and center of hole "E":	100 mm
Rod diameter "d":	40 mm
Maximum pressure:	250 bar
Block valve:	yes
Product weight:	14.5 kg
Cylinder internal diameter "D":	80 mm
Cylinder extension force (at 180 bar):	9.04 ton
Cylinder retraction force (at 180 bar):	6.78 ton
Rod hole diameter "F":	26 mm
Minimum length "Lmin":	600 mm
Cylinder hole diameter "F1":	22 mm
Cylinder stroke:	255 mm
Protection:	painted (black)

Code	Tractor Brand	Model
11671	FIAT-NEW HOLLAND	T.5030 NH - T.5040 NH

